

OFF ROAD PERFORMANCE

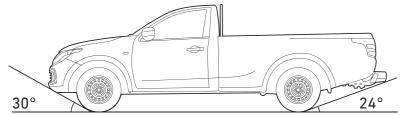

Approach angle*


Departure angle* (31° without rear bumper)

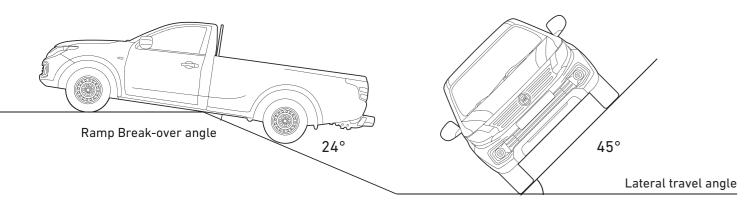

SINGLE CAB


*4x4 & 4x2 High ride

OFF ROAD PERFORMANCE

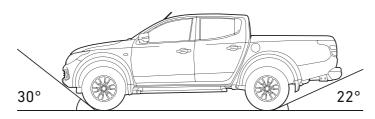

Approach angle

Departure angle* (25° without rear bumper)

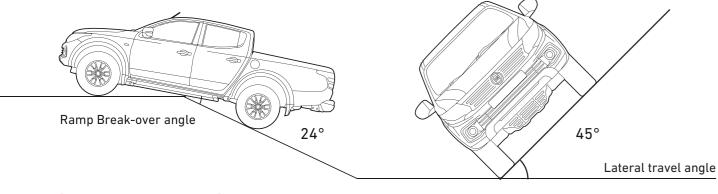

DOUBLE CAB


*4x4 & 4x2 High ride







he new Fullback comes in 3 versions - single cab, double cab and chassis-cab - so it covers all your needs. And with its spacious, reinforced cargo bed, it'll stand up to the heaviest loads.

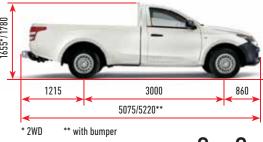

 $S_{\mathsf{ingle}}\,C_{\mathsf{ab}}$



1340/1410 3000 5205/5285**/5345** * 2WD ** with bumper

1470 2265



 $D_{\text{ouble}} C_{\text{ab}}$

BIGGER THE SUCCESS.



ITGIVES YOUR CHALLENGES A HUGE SPACE.

he new Fullback won't let you down, however tough the job is. But it's also got your comfort covered too. Its spacious and stylish interior is soundproofed, so you won't be distracted by noise or vibration. With supportive seats, optimised driving position, five upholstery options

(including leather), three dashboard styles (one for each trim) and automatic dual-zone air conditioning, it's got all the comforts of a car. And if that's not enough, the smart infotainment system gives you everything you need to tackle your day in style.





ou can count on the new Fullback any time, anywhere. Measuring 5.2 m long by 1.8 m wide. The new Fullback has a powerful, muscular look. But its key strength is its payload, of up to 1,000 kg.



f you want a relaxed ride without compromising on performance, why not go for the 5-speed automatic, which lets you change gear with a simple lever movement? Just slip it into 'Drive' and away you go.



ive-speed automatic gearbox

nd with the exclusive 4WD* electronic selector you can go anywhere, at any speed, in 4-wheel drive. So when the going gets tough, just turn the differential knob and send maximum torque to each wheel. Job done.



* only for automatic transmissio



Five-speed manual gearbox for the 4WD version

hen there's work to be done. The new Fullback ready for anything and totally unstoppable.

The new Fullback's range of powerful, reliable engines includes:

 a 2.5-litre diesel with 81 to 131 kW of power on tap, and a five-speed manual or automatic gearbox;

a 2.4-litre 97 kW petrol with five-speed manual gearbox.

But the new Fullback's not all about power, it's about protection too. So depending on trim, it comes with driver and passenger airbags and a range of safety systems, such as ESP with Hill Assist which makes the uphill departures easier, bi-xenon headlights, LED daytime running lights, rear view camera and cruise control.



tandard*

Drive system: 4x2 or 4x4
Suspension: Heavy Duty Suspension

Exterior: Black front bumper
Rear cromed bumper (opt)
Cargo bed outer hooks (opt)
Headlights: Halogen with black bezel

Windows: Manual

Air Conditioning (opt): Manual

* version available: single cab and double cab





Drive system: 4WD manual selector
Suspension: Touring suspension

Interior: Floor console with armrest Exterior: Body-coloured front bumper / Cargo bed outer hooks (opt) Headlights: Halogen with black bezel

Windows: Manual
Air Conditioning (opt): Manual
Alloy wheel (opt): 16"







Drive system: 4x2 High ride & 4x4 electronic selector

Suspension: Touring suspension Interior: Floor console with armrest Exterior: Chrome accents and

body-coloured bumper Headlights: Halogen with chrome bezel

Windows: Electric

Air Conditioning (opt): Automatic

Alloy wheel (opt): 17"



NEW FULLBACK



METALLIC





462 GR/Green







478 Brown

PASTEL







563 White



555 Black (Mica)



557 White (Pear

PROFESSIONAL



More care for your vehicle

ACCESSORIES BY MOPAR



Italian badge

Cargo bed liner



Sport bar

NEW FULLBACK



		AFRICA LHD									AFRICA RHD					GCC*			
BODY TYPE		DOUBLE CAB					SINGLE CAB			DOUBLE CAB			SINGLE CAB		DOUBLE CAB			SINGLE CAB	
MODEL CODE		4B4	4B5/4BB	485 / 48B	441	421	141	121	123 / 12C	9B2	9B5	9A5	635	630	E85	E80	E20	B20	
TRIM LEVEL		L	.X	SX	STANDARD	STANDARD		STANDARD	**		LX	LX	STA	NDARD	SX		STANDARD	STANDARD	
TRACTION			4WD			2WD	4WD	2WD		4WD		2WD HIGH-RIDE		2WD	4WD		2WD	2WD	
Overall Length w/o rear bumper (mm)		5205	5205	5205	5205	5205	5075	5075	5075	5205	5205	5205	5075	5075	5205	5205	5205	5075	
Overall Length w/ rear bumper (mm)		5345	5345	5345	5345	5345	5220	5220	5220	5345	5345	5345	5220	5220	5345	5345	5345	5220	
Width (mm)		1815	1815	1785	1785	1785	1785	1785	1785	1815	1815	1785	1785	1785	1815	1785	1785	1785	
Height (mm)		1780	1780	1780	1780	1765	1655	1655	1655	1780	1780	1775	1655	1655	1780	1780	1780	1655	
Track	FR (mm)	1520	1520	1520	1520	1520	1520	1520	1520	1520	1520	1520	1520	1520	1520	1520	1520	1520	
	RR (mm)	1515	1515	1515	1515	1515	1515	1515	1515	1515	1515	1515	1515	1515	1515	1515	1515	1515	
Overhang w/o rear bumper	FR (mm)	865	865	865	865	865	865	865	865	865	865	865	865	865	865	865	865	865	
	RR (mm)	1340	1340	1340	1340	1340	1215	1215	1215	1340	1340	1340	1215	1215	1340	1340	1340	1215	
Wheelbase (mm)		3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	
Bed dimensions	Length (mm)	1520	1520	1520	1520	1520	2265	2265	2265	1520	1520	1520	2265	2265	1520	1520	1520	2265	
	Width (mm)	1470	1470	1470	1470	1470	1470	1470	1470	1470	1470	1470	1470	1470	1470	1470	1470	1470	
Kerb weight kg	Hight (mm)	475 1830	475 1820	475 1805	475 1775	475 1590	475 1660	475 1500	475 1505	475 1835	475 1820	475 1705	475 1505	475 1410	475 1805	475 1685	475 1510	475 1410	
Gross vehicle weight kg		2870	2850	2850	2850	2570	2760	2570	2570	2870	2850	2760	2570	2570	2850	2700	2525	2570	
Seating capacity		5	5	5	Σ030 5	6	3	3	2370	5 5		5 5	2370	3	- L	 5	6	3	
Ground clearance		205	205	200	200	200	200	200	200	205	205	200	200	200	205	200	200	200	
Cargo floor height		850	850	845	845	715	710	710	710	850	850	845	710	710	850	845	845	710	
Departure angle w/o rear bumper		25	25	25	25	25	31	31	31	25	25	25	31	31	25	25	25	31	
Approach angle		30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	
PERFORMANCE			1		.!	!		·	.1				.!						
Max Speed km/h		165	167	167	147	147	147	152	165	179	167	167	165	169	167	169	169	169	
ENGINE			*	•	•			•	••		•								
Emission level		Euro2	Euro2/4	Euro2/4	Euro2	Euro2	Euro2	Euro2	Euro2/4	Euro2	Euro2	Euro2	Euro2	Euro2	Euro2		Euro2		
Туре		Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Petrol	Diesel	Petrol			
Displacement cc		2477	2477	2477	2477	2477	2477	2477	2477	2477	2477	2477	2477	2351	2477	2351			
Max output (EEC net) / kW (PS)		100 (136)	100 (136)	100 (136)	81 (110)	81 (110)	81 (110)	81 (110)	94 (128)	131 (178)	100 (136)	100 (136)	94 (128)	97 (32)	100 (136)	97 (32)			
Max Torque (EEC net) Nm		324	324	324	200	200	200	200	200	400	324	324	240	202	324		202		
FUEL SYSTEM														<u> </u>					
Fuel Supply system		Elettronic Common Rail Direct Injection								Elettronic Common Rail Direct Injection				Electronic Controlled Injection -Multi Point Injection	tion Elettronic Common Rail Direct Electronic Controlled Injection -Multi Point I		nt Injection		
Fuel tank capacity l		75								75			75		75 75				
TRANSMISSION																			
Туре		5-Speed Automatic	5-Speed Automatic 5-Speed Manual			5-Speed Manual			5-Speed Manual				5-Speed Manual	5-Speed Manual 5-Speed Manual					
STEERING																			
Туре		Rack and pinion power assisted								Rack and pinion power assisted						Rack and pinion power assisted			
Minimum turning radius m		5,9						5,7			5,9			5,7	5,9 5,7				
SUSPENSIONS															·				
Front		Wishbone, coil springs								Wishbone, coil springs				Wishbone, coil springs					
Rear		Rigid, elliptic laef springs									Rigid, elliptic laef springs				Rigid, elliptic laef springs				
BRAKES		16" Ventilated Disc 15" Ventilated Disc 16" Ventilated Disc 15" Ventilated Disc																	
Front					15" Ventilated Disc 10" Leading and trailing	16" Ventilated Disc 11,6" Leading and trailing			,	16" Ventilated Disc			15" Ventilated Disc		16" Ventilated Disc		15" Ventilated Disc 10" Leading and trailing drums		
Rear		11,0 Leading and traiting druins			drums	drums		d trailing drums		11,6" Leading and trailing drums 245/70R16 (245/65R17) 205R16C			10" Leading and trailing drums 195R15C		11,6" Leading and trailing drums 205R16C				
Tires		Z45//UR16	(Z43/63K1/)	205	KIOL	195R15C	205R16C	195	R15C	Z45//UR16	(Z45/65K1/)	205R16C	19	טנואנ	ZU5R16) L	198	GR15C	