

# SONALIKA

## HEAVY DUTY TRACTOR RANGE FOR YOUR FIELD

### WT 110 RX



High Torque 4 Cylinder  
Turbo Engine



Advanced Hydraulic  
3500Kg Lifting Capacity



12F+12R Synchro  
Shuttle Transmission



- Spacious operator area
- Tiltable and telescopic hydrostatic steering



Eminent  
Versatility,  
Build & Style



**COST  
EFFICIENT**  
MECHANICAL TRACTORS

MADE OF  
**REAL  
STEEL**

STRATEGIC  
COLLABORATION  
WITH  
**YANMAR**

## HEAVY DUTY TRACTOR RANGE FOR YOUR FIELD

### WT 110 RX




FEATURES	110
<b>Model Description</b>	SONALIKA 110
<b>ENGINE</b>	
Engine Type	Turbocharged intercooled engine
HP Category	107
No. of Cylinders	4
Cubic Capacity (cc)	4087
Rated RPM	2200
Air Cleaner	2 Stage Dry Air Filter with Dust Scavenging System
Max Torque (Nm)	420 Nm
<b>TRANSMISSION</b>	
Drive	4WD
Clutch	Double Clutch
Gearbox	12F+12R
Transmission	Synchro Shuttle Transmission
<b>SPEED (FORWARD)</b>	
Maximum Speed (Km/Hr)	34.86
Minimum Speed (Km/Hr)	1.67
<b>BRAKES</b>	
Brakes	Oil Immersed Brake
Type of Actuation	Hydraulically assisted
Parking Brake	Independent
<b>DIFFERENTIAL LOCK</b>	
Differential Lock	Yes
<b>PTO</b>	
PTO (RPM)	540/540E 540/1000 (optional)
PTO (Actuation)	Mechanical
<b>STEERING</b>	
Steering	Tiltable & Telescopic Hydrostatic Steering
<b>ELECTRICAL</b>	
Battery	12V, 110AH
Alternator	12V, 90Amp
Seven pin trailer socket	Yes
<b>HYDRAULICS</b>	
3 Point Linkage	Quick Attach CAT-II
Hydraulic Lifting Capacity	3500 Kg
Auxiliary Hydraulic Circuit	2DA/2SA
<b>SAFETY SWITCHES</b>	
Clutch Safety Switch	Yes
PTO Safety Switch	Yes
Neutral Safety Switch	Yes

FEATURES	110
<b>CAPACITY (LTRS)</b> (+/-5%)	
Fuel Tank (Ltr)	117
<b>TYRES</b>	
Front	380/85R24
Rear	460/85R34
<b>DIMENSIONS &amp; WEIGHT</b> (+/-5%)	
Weight (kg)	4085
Wheel Base (mm)	2375
Total Length (mm)	4315
Total Width (mm)	2255
Height (mm) up to Canopy	2690
Min Ground Clearance (mm)	470
<b>OTHERS</b>	
Front Tow Hook	Yes, inbuilt in front weight
Front & Rear Weights	Front : 72 +(31*8 ) Rear : 40X2 (rear wheels)
Rear Hitch	Heavy Duty Ladder Hitch
ROPS	Yes
Canopy	Yes (Optional)
<b>OPTIONAL</b>	
Bias tyre	Front : 14.9 x 24   Rear : 18.4 x 34

\*Since product improvement is a continuous process, specification and details provided are subject to change without prior notice. E&OE, Please correlate with latest updates, accessories shown may not be part of standards product.

DEALER STAMP

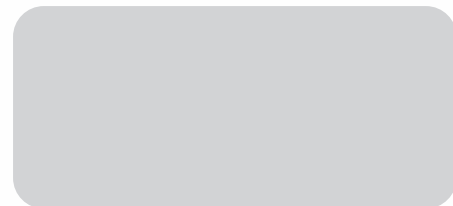

## INTERNATIONAL TRACTORS LIMITED

International Business Office: Teri School of Advanced Studies, Plot No.10, Institutional Area, Vasant Kunj, New Delhi-110070 (India)

Phone: +91 11 66 45 5200 | Work: Jalandhar Road, Hoshiarpur - 146022, Punjab (India) | Phone: +91 1882 522220, 522221

Fax: +91 1882 522222 | Email: [exports@sonalika.com](mailto:exports@sonalika.com) | URL: [www.international.sonalika.com](http://www.international.sonalika.com)